


ISA-WELD® // PRECISION RESISTORS



BVR // Size 4026

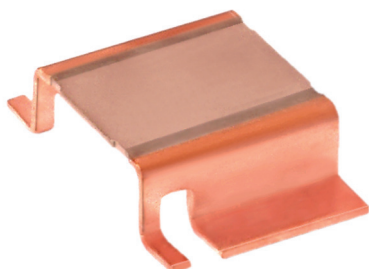

Features

- Power rating up to 12 W ¹
- Heavy copper connectors
- Excellent long-term stability
- Max. solder temperature up to 350 °C / 30 sec
- AEC-Q200 qualified
- RoHS 2011/65/EU compliant



Applications

- Current sensor for power hybrid applications
- High current applications for the automotive market
- Frequency converters
- Power modules

Technical data ¹

Resistance values	mOhm	0.2 to 3
Tolerance	%	1 / 5
Temperature coefficient (20-60 °C)	ppm/K	from 20
Applicable temperature range	°C	-65 to +170
Power rating P_{100°C}	W	up to 5
Power rating P_{70°C}	W	up to 12
Internal heat resistance (R _{thi})	K/W	from 4
Inductance	nH	<3
Stability (nominal load) deviation after 2000h, T _K = Terminal temperature		<0.5 % (T _K =100 °C) <1.0 % (T _K =130 °C)

¹ For detailed information see table on page 3

Ordering code

BVR - Z - R0005 - 1.0

.....	Tolerance
.....	Resistance value [Ohm] / „R“ represents decimal point
.....	Material (ZERANIN®)
.....	Type



BVR // 4026


Recommended solder profile

Reflow-, IR-soldering

Temperature	°C	260	255	217
Time	sec	peak	40	90

Tape and reel information

Specification		DIN EN 60286-3
Tape width	mm	24
Reel size	inch	13
Parts per reel	pcs	1400
Packaging weight	g	576

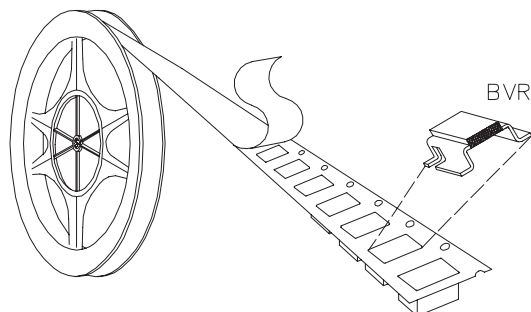**Specification**


Parameters	Test conditions	Specified values
Temperature Cycling	2000 cycles (-55 °C to +150 °C)	±0.5 %
Low Temperature Storage and Operation	-65 °C for 250 h	±0.1 %
Resistance to Soldering Heat	260 °C for 10 sec / 8h steam aging	n.a.
Moisture Resistance	MIL-STD-202 method 106	±0.1 %
Mechanical Shock	100 g, 6 ms half sine	±0.2 %
Vibration, High Frequency	10 g, 10-2000 Hz, 24 h each axis	±0.2 %
Operational Life	2000 h, T _K max at rated power	±1.0 %, T _K = 130 °C
High Temperature Exposure	2000 h / 170 °C	±1.0 % (in covered condition)*
Bias Humidity	+85 °C, 85 r.F., 1000 h	±0.5 %

* for MANGANIN® and ZERANIN®30



BVR // 4026

Mechanical dimensions and pcb-layout proposal (Reflow-soldering) [mm] // Z-YF-148e

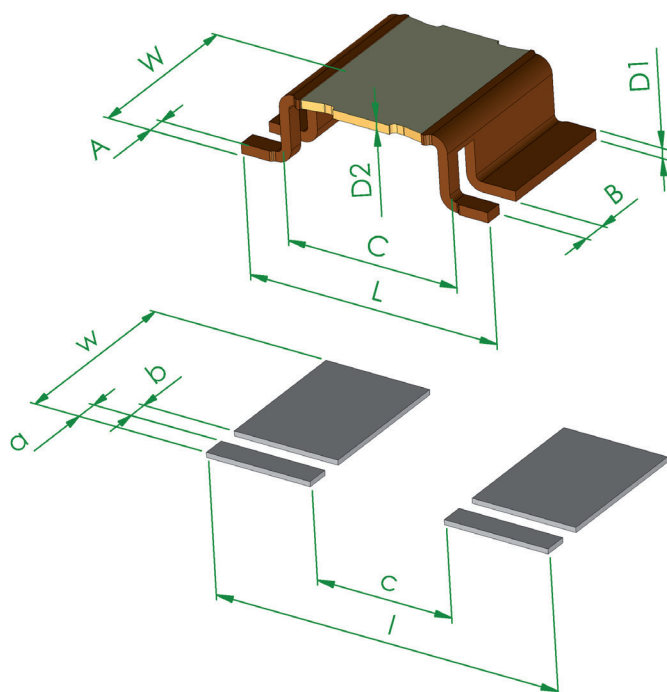

Type:	A	B	C	D1	D2	L	W
BVR-Z-R0002	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	1.2 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-Z-R0003	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.85 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-Z-R0004	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.55 ±0.1	0.55 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-Z-R0005	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.42 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-Z-R00062	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.355 ±0.1	0.355 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-M-R0007	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.44 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-M-R001	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.35 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-I-R001	0.7 ±0.1	1.0 ±0.1	7.42 ±0.2	0.66 ±0.1	1.1 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-I-R002	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.55 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2
BVR-V-R002	0.7 ±0.1	1.0 ±0.1	6.9 ±0.2	0.4 ±0.1	0.34 ±0.1	10.1 ±0.2	6.6 +0.35/-0.2

Type	Value [mΩ]	R _{thi} [K/W]	TCR [ppm/K]	P _{70 °C}	P _{T_K > 100 °C} T _K = 170 °C - (R _{thi} x P)
BVR-Z-R0002	0.2	4	<20	12 W	5 W
BVR-Z-R0003	0.3	5	<20	11 W	5 W
BVR-Z-R0004	0.4	7	<20	10 W	5 W
BVR-Z-R0005	0.5	8	<20	9 W	5 W
BVR-Z-R00062	0.62	10	<20	8 W	4 W
BVR-M-R0007	0.7	12	<20	8 W	4 W
BVR-M-R001	1.0	14	<50	7 W	4 W
BVR-I-R001	1.0	9	<50	8 W	5 W
BVR-I-R002	2.0	14	<50	6 W	4 W
BVR-V-R002	2.0	17	<50	6 W	4 W
BVR-I-R003	3.0	21	<50	5 W	3 W

Abbreviation type I=ISAOHM®, M=MANGANIN®, V=NOVENTIN®, Z=ZERANIN®30


T_K: terminal temperature (Kontaktstellentemperatur)



BVR // 4026


Power derating curve at 100 °C

Example: BVR-Z-R0005

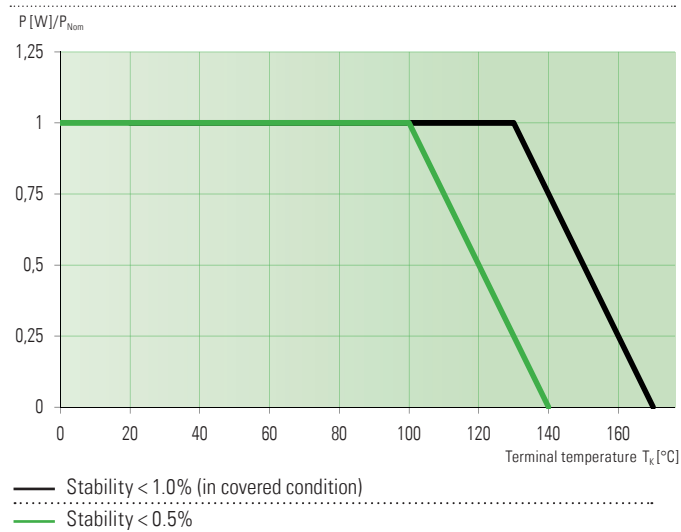


Power derating curve at 70 °C


Example: BVR-I-R002

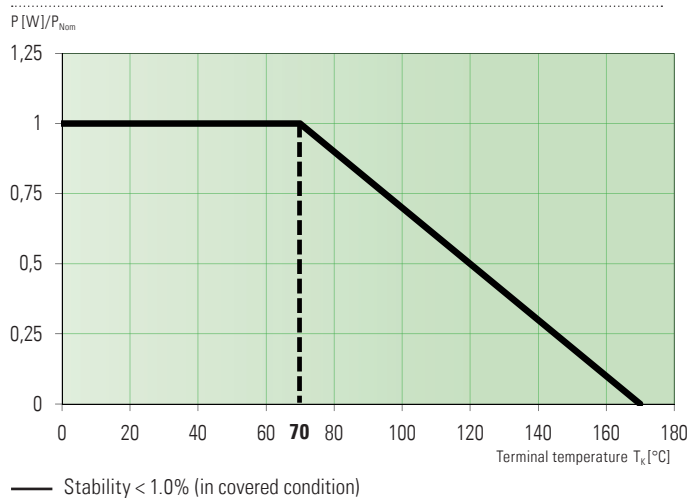


Temperature dependence of the electrical resistance of MANGANIN® resistors

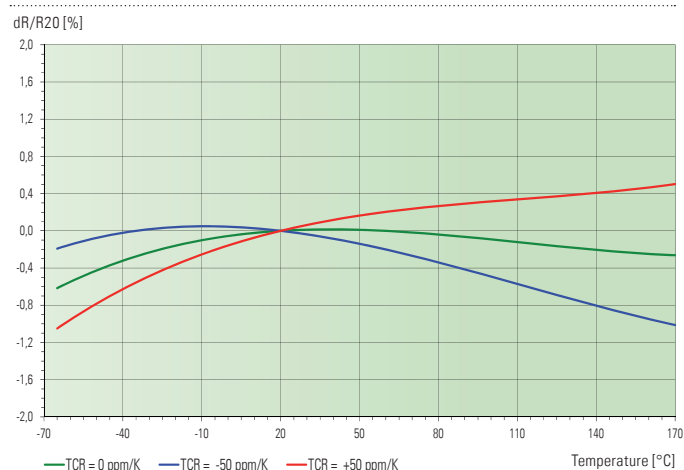


Temperature dependence of the electrical resistance of ZERANIN® resistors

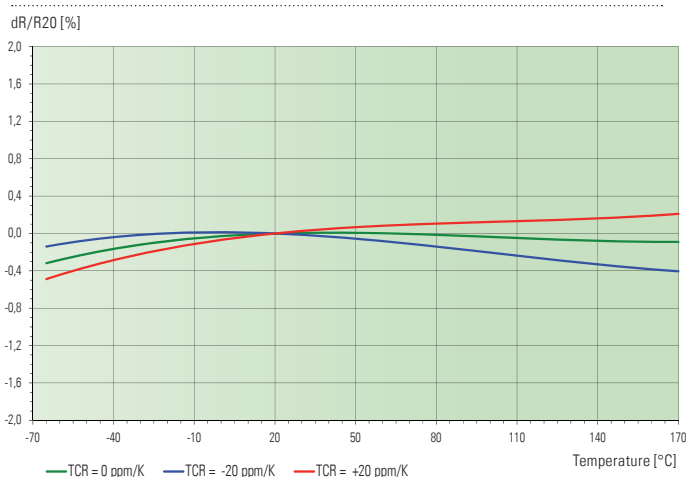

Temperature dependence of the electrical resistance of ISOHIM® resistors

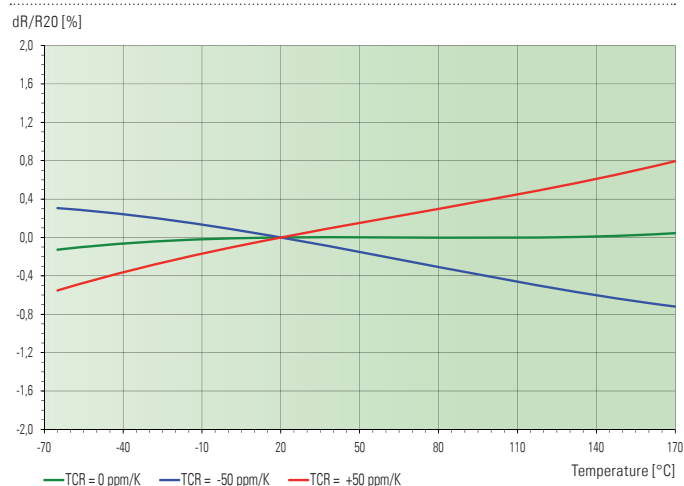


Temperature dependence of the electrical resistance of NOVENTIN® resistors

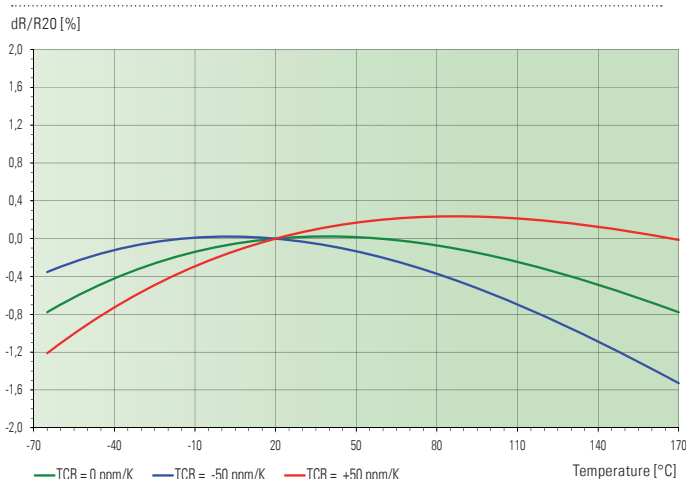



Maximum pulse energy respectively pulse power for permanent operation

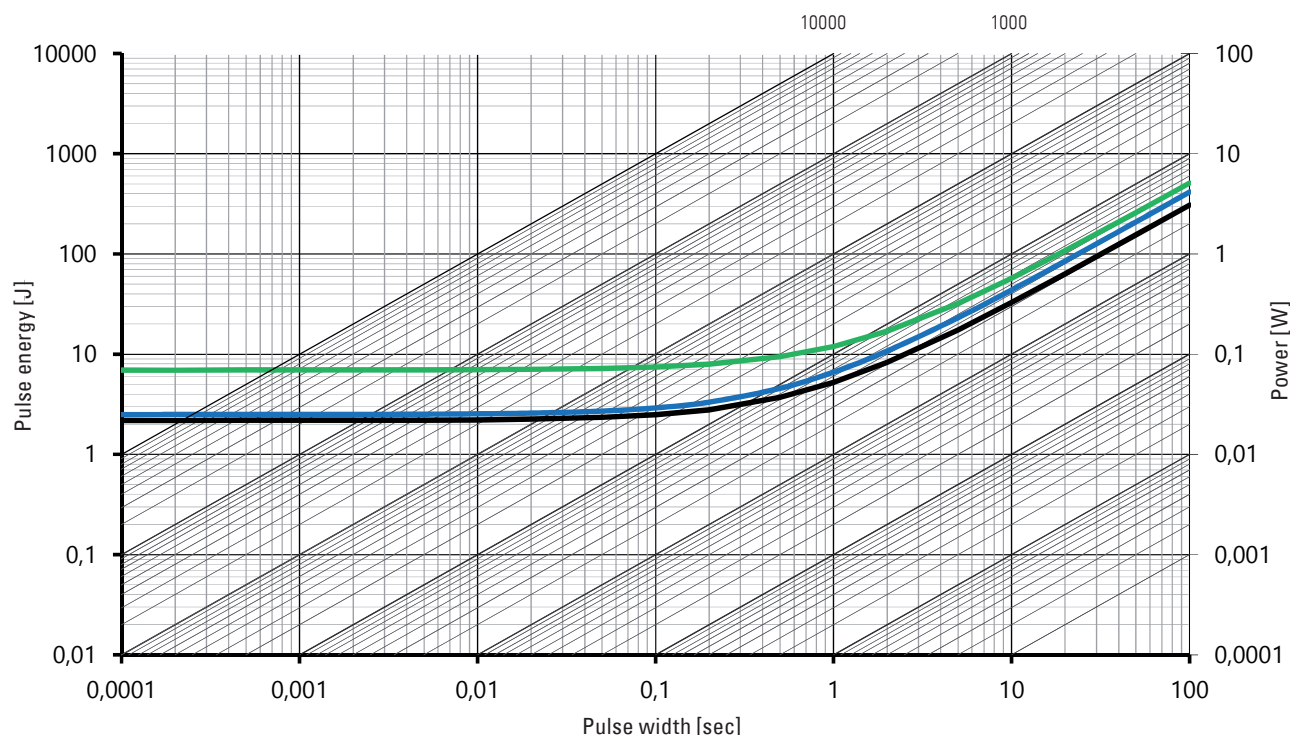

- This curve is valid for the resistance value R0002
- This curve is valid for the resistance value R0007
- This curve is valid for the resistance value R003

Disclaimer // All products, product specifications and data are subject to change without notice.

The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale.

Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended.

No license, express or implied, or otherwise, to any intellectual property rights is granted by this document.

Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.

